



Digital Height Gauges

626 Series

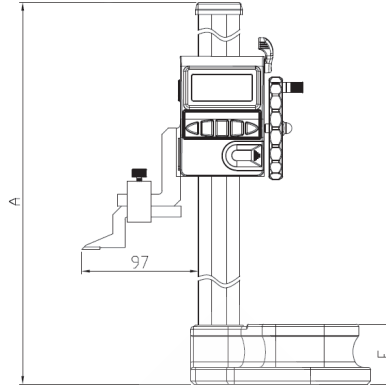

626-24-2



FEATURES

- Resolution: .0005" / 0.01mm
- Built in wireless data transmission
- External digital data input function, no need to
- repeat dial "0" to achieve rapid detection
- Built in external power port
- Protection level IP65


Inch		Metric			Dimensions						
Code No.	Range	Resolution	Accuracy	Range	Resolution	Accuracy	A	B	C	D	E
626-12-2	0-12"	.00005"	±.0015"	0-300mm	0.01mm	±0.04mm	492mm	241mm	150mm	100mm	50mm
626-24-2	0-24"	.00005"	±.0015"	0-600mm	0.01mm	±0.05mm	796mm	274mm	183mm	120mm	57mm

Single Beam Digital Height Gauges With Hand Wheel

626 Series




626-12-0

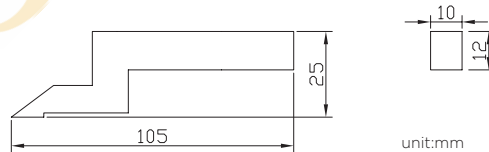

FEATURES

- Resolution: .0005" / 0.01mm
- Large LCD display
- Hand wheel designed for fine adjustment
- Metric/Inch conversion at any position
- Zero setting at any position
- Carbide tipped scriber provided

Inch		Metric	
Code No.	Range	Accuracy	Accuracy
626-12-0	0-12"	±.0015"	±0.04mm
626-18-0	0-18"	±.0015"	±0.04mm
626-24-0	0-24"	±.0020"	±0.05mm




Digital Height Gauges

625 Series



625-24-0

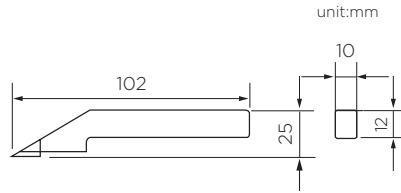

FEATURES


- Resolution: .0005" / 0.01mm
- Origin memory eliminates the need to zero the reading each time the height gauge is turned on
- Can be used with a test indicator and holder for precise measurement
- Inch/Metric conversion
- The fine-adjustment allows the slider to be precisely positioned
- The base is designed with a thermal heat isolation hand grip

Code No.	Inch		Metric	
	Range	Accuracy	Range	Accuracy
625-12-0	0-12"	±0.015"	0-300mm	±0.04mm
625-24-0	0-24"	±0.020"	0-600mm	±0.05mm
625-40-0	0-40"	±0.040"	0-1000mm	±0.07mm


Double Beam Digital Height Gauges

627 Series

NEW

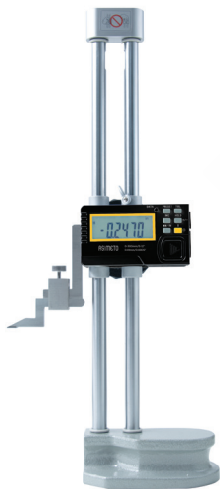

627-12-4




FEATURES

- Resolution: .0005" / 0.01mm
- Large LCD display
- Inch/Metric system conversion
- High precision, measurement more accurate
- Designed with hand wheel micro-adjustable rack and pinion for precision positioning
- Can be used with a test indicator and holder for precise measurement
- External digital data input function, no need to repeat dial "0" to achieve rapid detection
- Built in bluetooth data transmission(optional)
- Support SPC data output type
- Cable data output: 900-07-0/1
- (Support SPC data output type)
- Wireless data output: (Support SPC data output type)
- Transmitting Device: 901-00-2/7
- Receiver Device: 901-00-3
- Bluetooth data output: 901-01-0/3 (Support SPC data output type)



Code No.	Inch		Metric		Data Output Type
	Range	Accuracy	Range	Accuracy	
627-12-4	0-12"	±.001"	0-300mm	±0.02mm	SPC
627-18-4	0-18"	±.0015"	0-450mm	±0.03mm	SPC
627-24-4	0-24"	±.0015"	0-600mm	±0.03mm	SPC
627-12-6	0-12"	±.001"	0-300mm	±0.02mm	Bluetooth
627-18-6	0-18"	±.0015"	0-450mm	±0.03mm	Bluetooth
627-24-6	0-24"	±.0015"	0-600mm	±0.03mm	Bluetooth




Double Beam Digital Height Gauges

627 Series



627-24-0

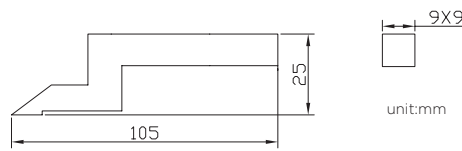

unit:mm




FEATURES

- Resolution: .001" / 0.01mm
- Large LCD display
- Inch/Metric system conversion
- High precision, measurement more accurate
- Designed with hand wheel micro-adjustable rack and pinion for precision positioning
- Can be used with a test indicator and holder for precise measurement


Code No.	Inch		Metric	
	Range	Accuracy	Range	Accuracy
627-12-0	0-12"	±.001"	0-300mm	±0.02mm
627-18-0	0-18"	±.0015"	0-450mm	±0.03mm
627-24-0	0-24"	±.0015"	0-600mm	±0.03mm

Double Beam Digit Counter Height Gauges

623 Series

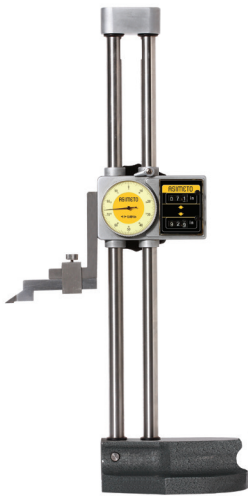

623-18-0

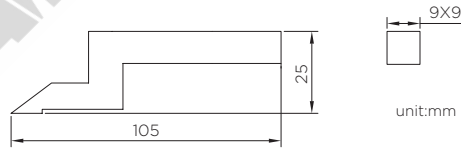


unit:mm

FEATURES

- Graduation: .001" / 0.01mm.
- Position is displayed by a combination of the digit counter and the dial
- Hand wheel design for both coarse and fine adjustments
- Digit counter graduation: Inch .1" / Metric 1mm
- The digit counters provide bi-directional positioning and the capability of setting zero at any position


Inch		
Code No.	Range	Accuracy
623-12-1	0-12"	±.0015"
623-18-1	0-18"	±.0020"
623-24-1	0-24"	±.0020"
623-40-1	0-40"	±.0030"

Metric		
Code No.	Range	Accuracy
623-12-0	0-300mm	±0.04mm
623-18-0	0-450mm	±0.05mm
623-24-0	0-600mm	±0.07mm
623-40-0	0-1000mm	±0.07mm




Vernier Height Gauges

621 Series

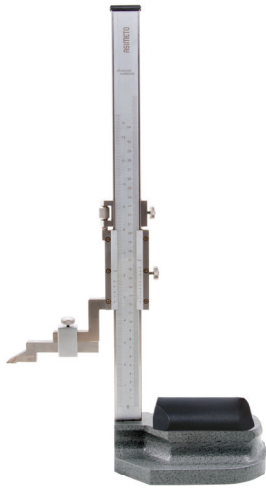


621-12-0

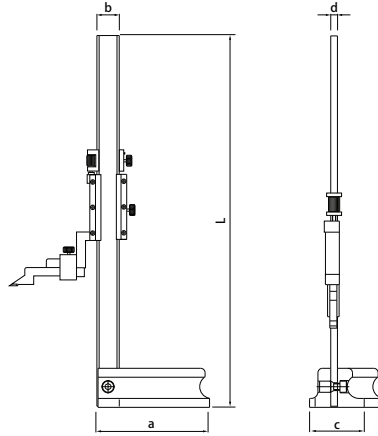


FEATURES


- Graduation:
Inch: .001" or 1/128"
Metric: 0.02mm or 0.05mm
- The fine-adjustment allows the slider to be precisely positioned
- Matte chrome finish
- Stainless steel design
- The base is designed with a thermal heat isolation hand grip



For: 621-08-OL 621-08-2L
621-12-OL 621-12-2L



For: 621-12-0 621-12-2
621-20-0 621-20-2
621-24-0 621-24-2

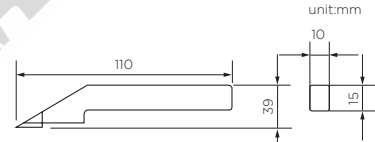

For: 621-40-0 621-40-2

Inch		Metric			Dimensions						
Code No.	Range	Graduation	Accuracy	Range	Graduation	Accuracy	a	b	c	d	L
621-08-OL	0-8"	1/128"	±.0015"	0-200mm	0.05mm	±0.05mm	135mm	20mm	80mm	6mm	330mm
621-12-OL	0-12"	1/128"	±.0015"	0-300mm	0.05mm	±0.05mm	135mm	20mm	80mm	6mm	430mm
621-12-0	0-12"	1/128"	±.0015"	0-300mm	0.05mm	±0.05mm	175mm	30mm	115mm	10.5mm	520mm
621-20-0	0-20"	1/128"	±.0015"	0-500mm	0.05mm	±0.08mm	175mm	30mm	115mm	10.5mm	720mm
621-24-0	0-24"	1/128"	±.0020"	0-600mm	0.05mm	±0.10mm	175mm	30mm	115mm	10.5mm	820mm
621-40-0	0-40"	1/128"	±.0020"	0-1000mm	0.05mm	±0.10mm					
621-08-2L	0-8"	.001"	±.0015"	0-200mm	0.02mm	±0.03mm	135mm	20mm	80mm	6mm	330mm
621-12-2L	0-12"	.001"	±.0015"	0-300mm	0.02mm	±0.04mm	135mm	20mm	80mm	6mm	430mm
621-12-2	0-12"	.001"	±.0015"	0-300mm	0.02mm	±0.04mm	175mm	30mm	115mm	10.5mm	520mm
621-20-2	0-20"	.001"	±.0015"	0-500mm	0.02mm	±0.05mm	175mm	30mm	115mm	10.5mm	720mm
621-24-2	0-24"	.001"	±.0020"	0-600mm	0.02mm	±0.07mm	175mm	30mm	115mm	10.5mm	820mm
621-40-2	0-40"	.001"	±.0020"	0-1000mm	0.02mm	±0.07mm					