


03S 立车用中实油压夹头

3-JAW SOLID POWER CHUCK

- 夹头正面滑道处加装防护装置。
- 适用于立式车床使用。
- Non through-hole power chuck for vertical
- lathe(adapter included)



尺寸图 Dimensions

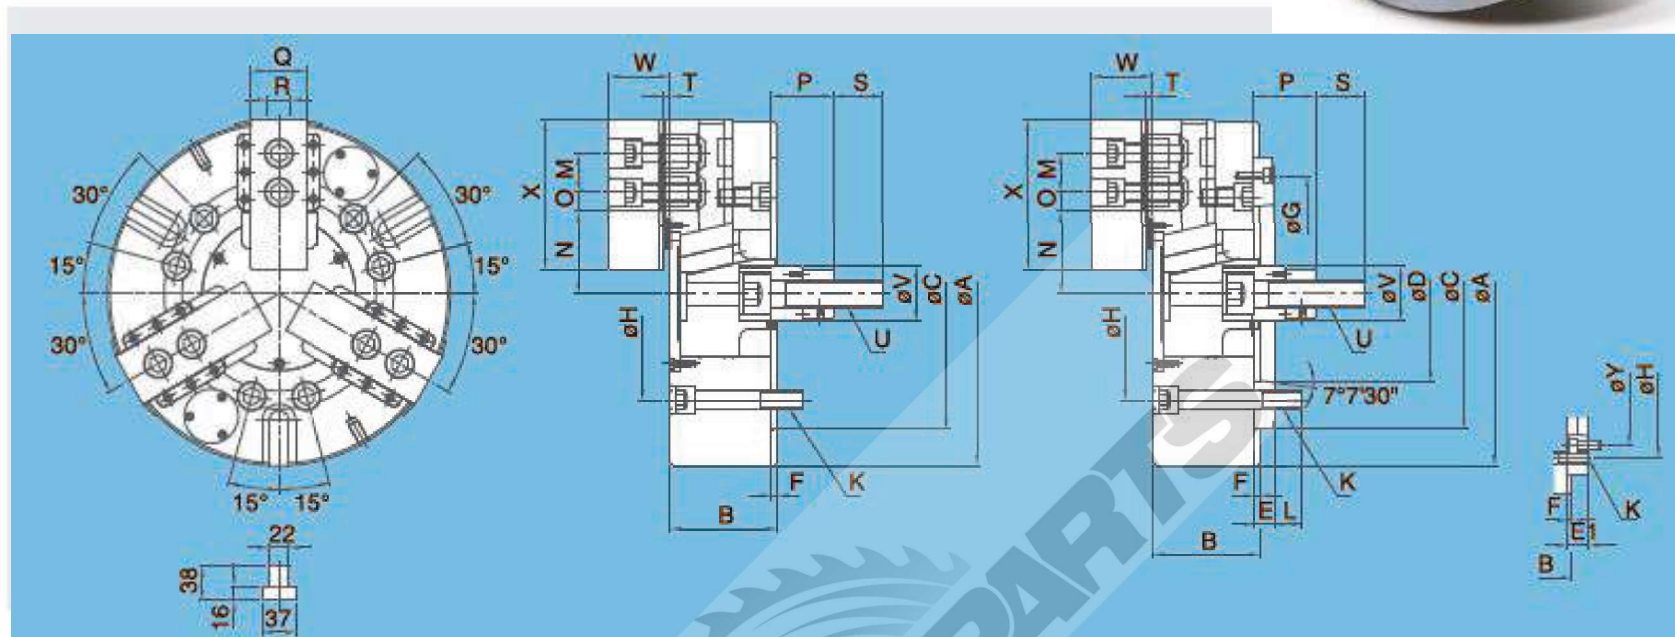

规格表 Specification

单位/UNT:mm

型号 Model	主轴鼻端番号 Nose of spindle	A	B	C (h6)	D	E	E1	F	G	H	K	L	M
03S15	A2-11	381	114	300	196.869	22	-	6	260	235	6-M20 x 2.5P	32	43
03S18	A2-11	450	114	300	196.869	22	-	6	260	235	6-M20 x 2.5P	32	43
03S21	A2-15(A2-11)	530	127	380	285.775	27	41	6	330.2	330.2	6-M24 x 3P	33	60
03S24	A2-15(A2-11)	610	127	380	285.775	27	41	6	330.2	330.2	6-M24 x 3P	33	60
03S32	A2-15(A2-11)	800	127	380	285.775	27	41	6	330.2	330.2	6-M24 x 3P	33	60
03S40	A2-15(A2-11)	1000	127	380	285.775	27	41	6	330.2	330.2	6-M24 x 3P	33	60

型号 Model	N (max)	N (min)	O (max)	O (min)	P (max)	P (min)	Q	R	S	T	U	V	W	X	Y
03S15	69.05	60.97	58.05	40.05	104	69	62	25.5	55	7	M30x3.5P	60	68	165	-
03S18	99.46	91.38	58.05	40.05	92	57	62	25.5	55	7	M30x3.5P	60	68	165	-
03S21	80.49	72.41	101.8	41.8	96.95	62	65	25	55	7	M30x3.5P	60	75.5	180	235
03S24	119.49	111.41	101.8	41.8	96.95	62	65	25	55	7	M30x3.5P	60	75.5	180	235
03S32	119.49	111.39	197.8	41.8	97	62	65	25	55	7	M30x3.5P	60	75.5	180	235
03S40	119.49	111.39	299.8	41.8	97	62	65	25	55	7	M30x3.5P	60	75.5	180	235

型号 Model	夹持直径 Grip Dia (mm)		柱塞行程 Plunger Stroke (mm)	爪行程 Jaw stroke (mm)	最大拉力 Max. pull force		最高回转速度 Max. speed r.p.m(min ⁻¹)	净重 Weight (kg)	搭配 油压缸型号 Matching Cylinder	最大设定油压压力 Max. hydraulic pressure	
	max	min			kgf	(KN)				kgf	(KN)
03S15	ø68-ø381		35	16	8650 (81)	25290 (248)	3000	104.1	RH-200	32 (3.1)	
03S18	ø100-ø450		35	16	8650 (81)	25290 (248)	2700	138.5	RH-200	32 (3.1)	
03S21	ø80-ø530		35	16	8650 (81)	2700 (265)	1900	204.8	RH-200	33 (3.2)	
03S24	ø155-ø610		35	16	8650 (81)	2700 (265)	1700	260	RH-200	33 (3.2)	
03S32	ø155-ø800		35	16	8650 (81)	2700 (265)	1100	455.4	RH-200	33 (3.2)	
03S40	ø155-ø1000		35	16	8650 (81)	2700 (265)	800	-	RH-200	33 (3.2)	